



ISO8528

GC ; ) &

SZUTEST

GC - \$\$\$

CE

2000/14/EC

&\$\$\$#( #

z\*\$ z'%\$D:

	"	"	"	"	Amp
480/277		250,00		215,00	323,00
380/220		248,00		213,00	404,00
208/120		249,00		214,00	743,00

fPGDL

GC ; ) &

) & z

rDF DL

%\$i

%

%&

GC" \$(\*\*

z&(

GC

Standard Specifications

(\*#\$\$S

z


fl

!

E

z


z

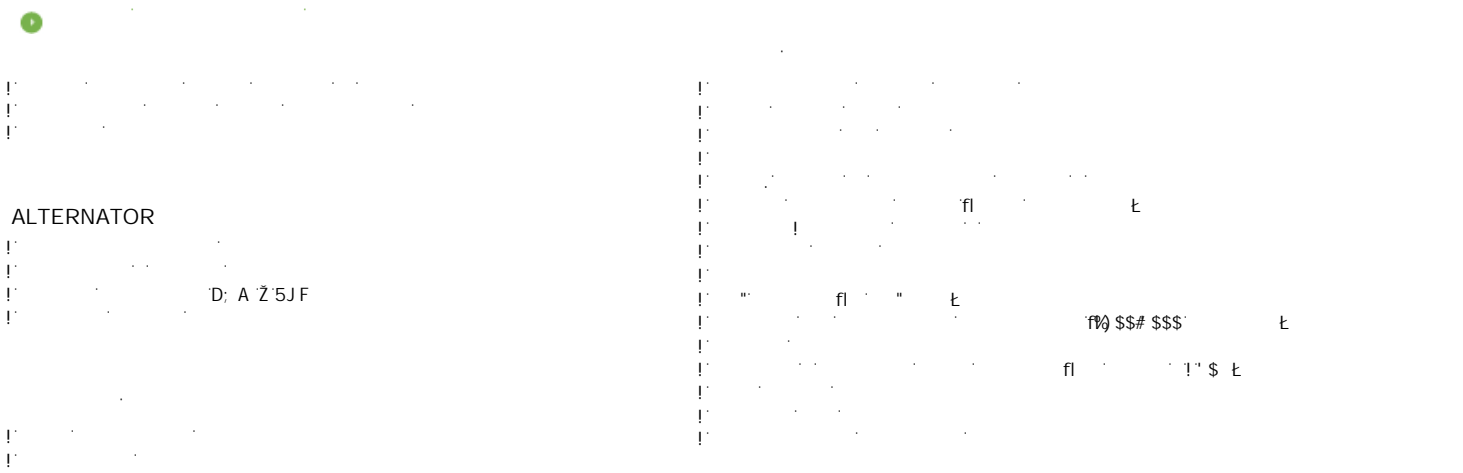

Manufacturer		John Deere		
Model		6081 HF		
	L	8,10		
	"	116 X 129		
		15.7:1		
	fl # Ł	"# "	1800	
	fl "Ł	L	32,00	
		L	44,00	
AbsorbedAirDischargeReSourceKey.Text	' # "	21,20		
	' # "	58,00		
	° C	514		
		12 V d.c.		
	Load	%\$İ	'+) İ	)\$İ
	# "			
		64,80	47,90	32,00

		Stamford
		UCI 444D
	Hz	60
	"	300
7 cg'		0,80
		3
	fl Ł	480/277
	A	451
Temperatur		H

		fl "Ł		fl "Ł	
	"	"	"	"	L
AJD 250-6	2335	2900	1170	1900	420
		fl "Ł		fl "Ł	
	"	"	"	"	L
ASM 7	3075	4000	1210	2000	420

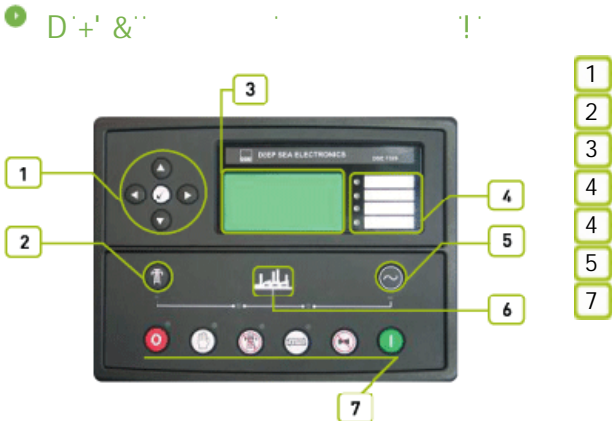





f@#@Bl  
f@#@!@ t

" " " " " " " " " " " " "

f@#@Bl

971

#

#

#

#

#

6G'9B \*\$-\$) \$

6G'9B \*%\$\$#!&

6G'9B \*%\$\$#!(

f&)(, t

f&%) +t

f&% \$t

'GA 8'

"

%, !&\$

&(\$)

ž

ž

!&('

"


ž

ž

"

"

5GA +!

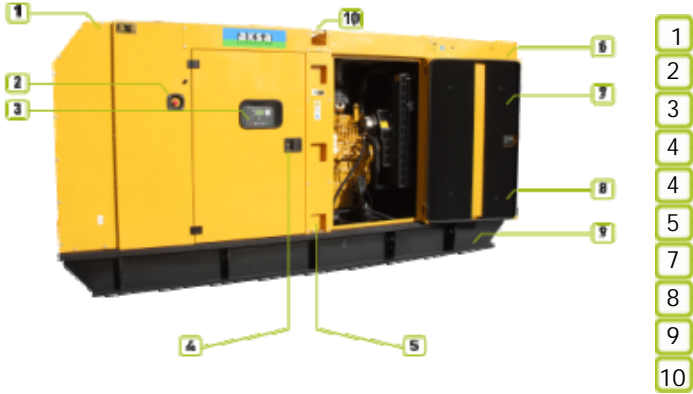

- 1
- 2
- 3
- 4
- 4
- 5
- 7
- 8
- 9
- 10

	"	1210
f) "7	"	4000
f) "7	"	2000
		420