




ISO8528	GC ;) &
SZUTEST	GC - \$\$\$
CE	

2000/14/EC & \$\$\$#(#
 z* \$ z' % \$ D:

	"	"	"	"	Amp
480/277		354,00		321,00	482,00
380/220		322,00		292,00	554,00
208/120		352,00		320,00	1111,00

Standard Specifications
 (*# \$ \$ z
 fl ! E
 z
 z

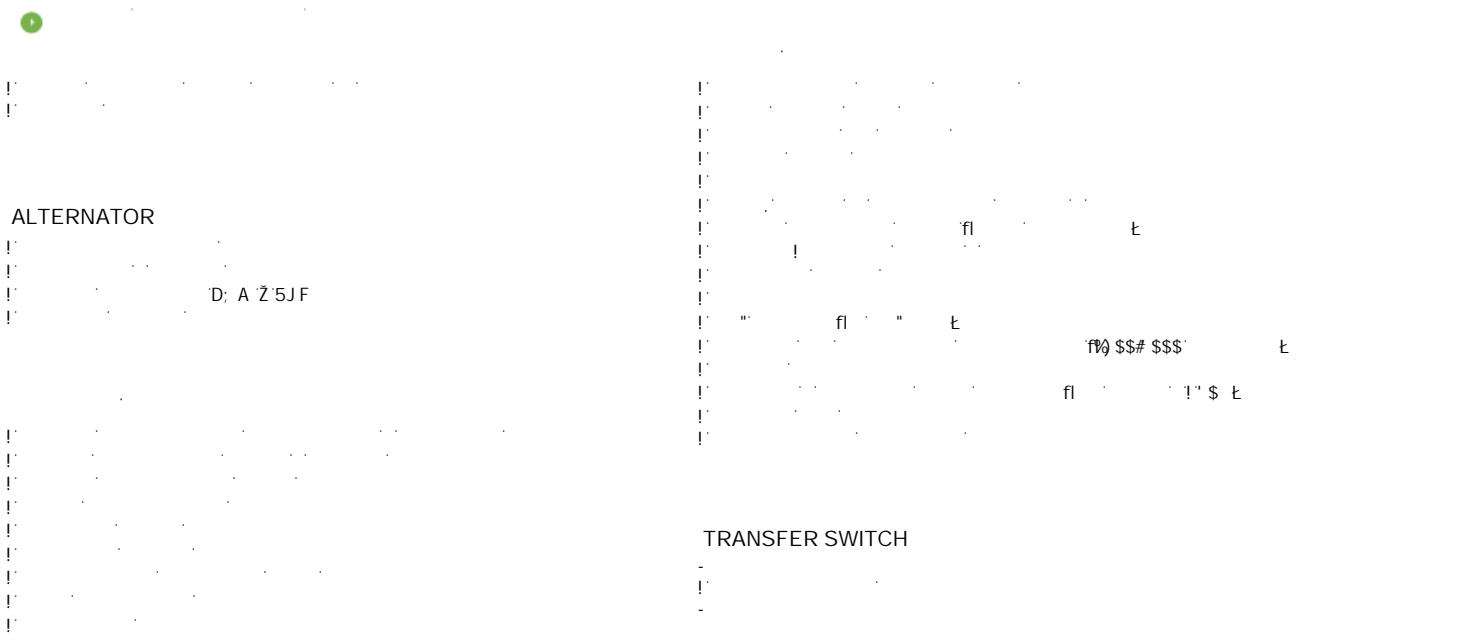

Manufacturer		John Deere		
Model		6135HF485		
Epa		TIER III		
	L	13,50		
	"	132x165		
		16,0:1		
	fl # ı	"# "	1800	
	fl ı	L	60,00	
		L	66,00	
AbsorbedAirDischargeReSourceKey.Text	' # "	33,00		
	' # "	75,00		
	° C	446		
		12 V d.c.		
	Load	%\$ı	'+)ı)\$ı
	# "			
		88,00	65,80	50,30


		Stamford		
		HCI444E		
	Hz	60		
	"	352		
7 cg		0,80		
		3		
	fl ı	480/277		
	A	508		
Temperatur		H		

		fl ı		fl ı	
	"	"	"	"	L
AJD354-U	3550	3150	1170	2050	330
		fl ı		fl ı	
	"	"	"	"	L
AK 70	4830	4560	1470	2300	650

AJD354-U

John Deere
Stamford
D+' &'

1 D+' &'

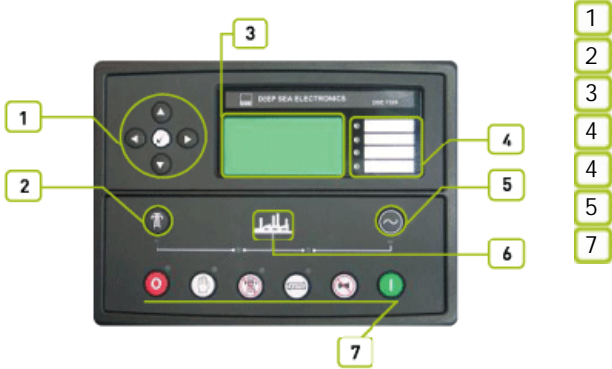

2

"8G9ž +' &\$ž) 5ž&&\$#(\$

3

4

5


'8G9+' &\$
) \$' ž

fi

"'8G9+' &\$'
'8G9+' &\$'
ž "

% &1 '*(' "
žFG&' &žFG(,) ž "

ž

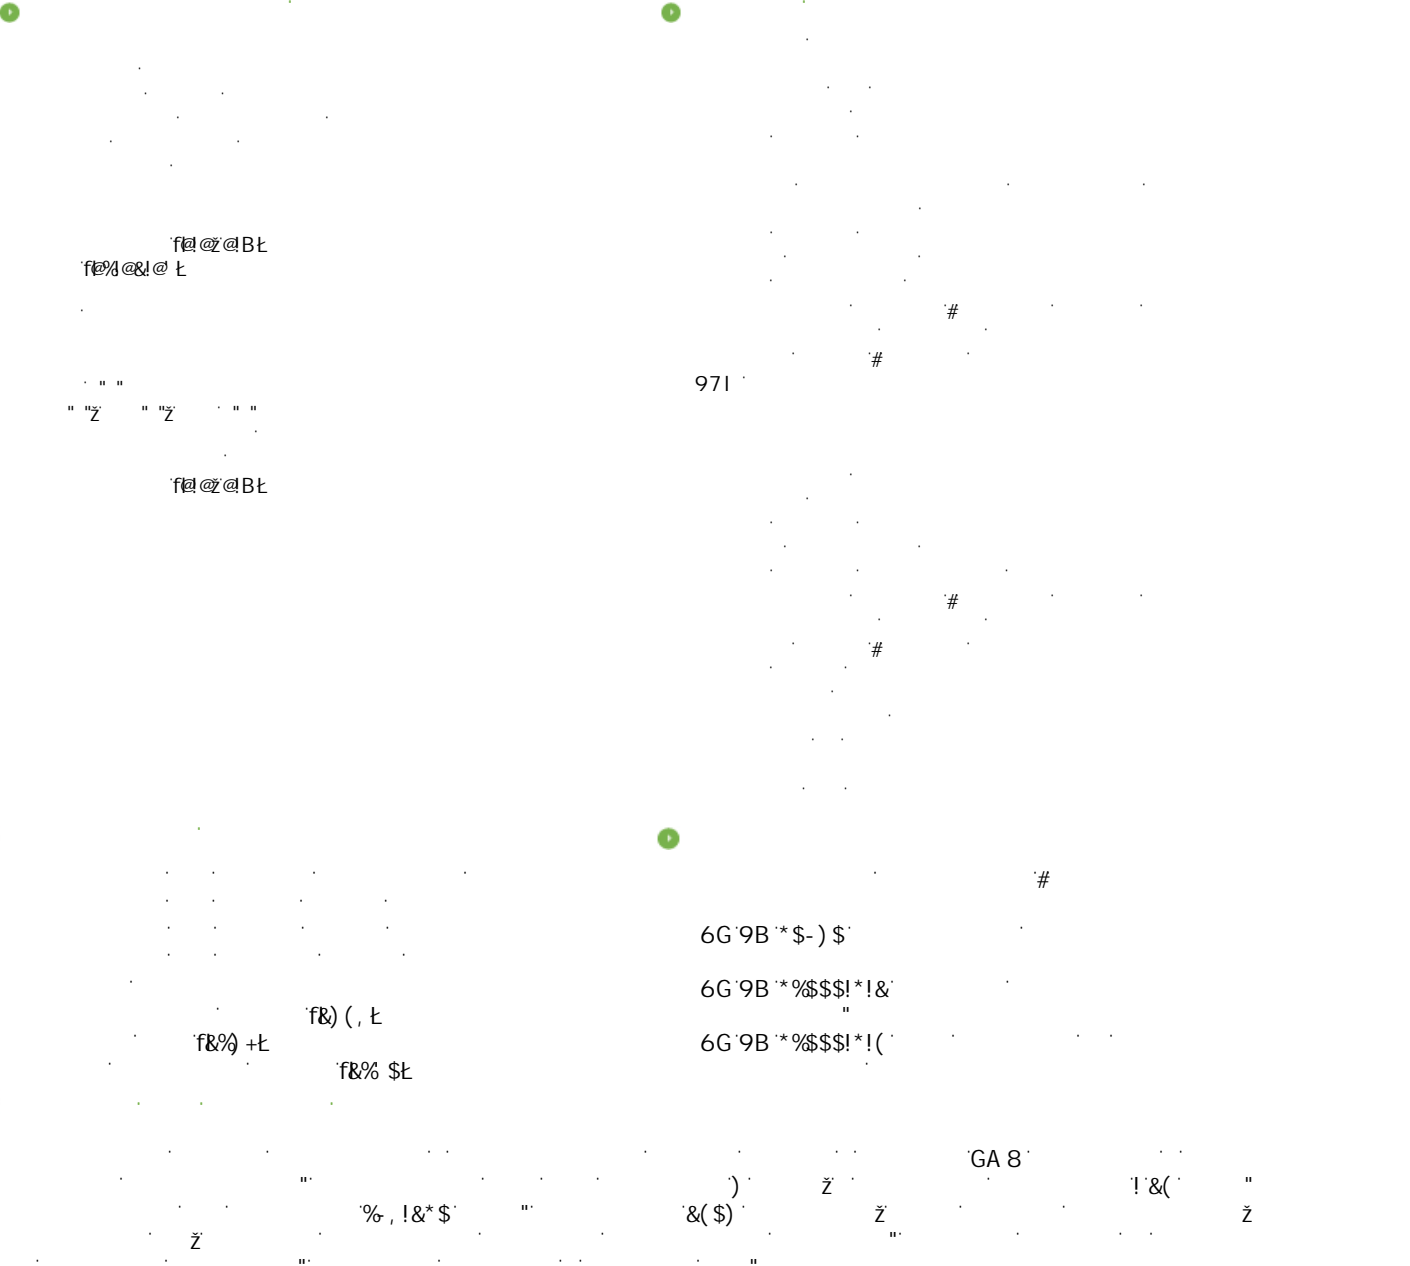

5? '+\$!'



1. 1470

2. 4560

3. 2300

4. 650

5. 1470

6. 4560

7. 2300

8. 650

9. 1470

10. 4560

	"	1470
fl "L	"	4560
fl "L	"	2300
		650