

ISO8528

GC ; ) &

SZUTEST

GC - \$\$\$



2000/14/EC

&\$\$\$#( #

z\*\$' z'z' D:

	"	kw	"	kw	Amp
480/277		407,00		358,00	538,00
380/220		365,00		332,00	631,00
208/120		403,00		352,00	1221,00

fPQDE

GC ; ) &

) & z

fDF DE

%\$1

%

%&

GC " \$(\*\*

z&(

GC

Standard Specifications

z

fl

!

E

z

z

ALTERNATOR

D; A Z'5JF


TRANSFER SWITCH

Manufacturer	Doosan			
Model	P 158 LE			
		%	\$	#
		458,00 kw [614,00HP]		
	L	14,600		
	"	128x142		
		15:1		
	fl # ı	"#	"	1800
	fl ı	L	21,00	
		L	68,50	
AbsorbedAirDischargeReSourceKey.Text	' # "	36,90		
	' # "	91,30		
	° C	606,00		
		24 V d.c.		
	Load	%\$ı	'+)ı	)\$ı
	# "	102,50	74,70	50,60

		Stamford
		HCI544C
	Hz	60
	kw	400,00
7 cg		0,80
		3
	fl ı	480/277
	A	601,00
Temperature		H

		fl ı		fl ı	
	"	"	"	"	L
AD 407-6	3130,00	3031,00	1550,00	1994,00	700,00
		fl ı		fl ı	
	"	"	"	"	L
MS 70	4150	4460	1606	2477	700

1 D+ &

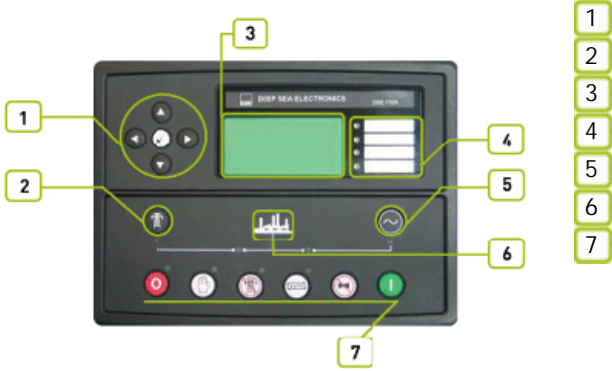

2

8G9ž + &\$ž ) 5ž&&\$#(\$

3

4

5

8G9+' &\$  
&&\$' ž

8G9+' &\$

8G9+' &\$

% &1 \* (

žFG&' &žFG(,) ž



f@z@Bl  
f@z@Bl

"z" "z" "z" "z"

f@z@Bl

971

#

#

#

#



f&%) +L

f&)(, L

f&%) \$L

6G'9B '\*\$-\$)'\$

6G'9B '\*%\$\$\$!\*!&

6G'9B '\*%\$\$\$!\*!(

#



ž

%, !&\*(

&(\$)

ž

ž

GA 8

!&+""

ž

# AD 407-6

Doosan  
Stamford  
D+ & "



- 1 Steel structures.
- 2 Emergency stop push button.
- 3 Control panel is mounted on the baseframe . Located at the right side of the generator set.
- 4 Corrosion-resistant locks and hinges.
- 5 oil could be drained via valve and a hose
- 6 Exhaust system in the canopy.
- 7 special large access doors for easy maintenance
- 8 in front and back side special large access doors for easy maintenance
- 9 Base frame -fuel tank.
- 10 Lifting points similar to ISO container , located on each top corner of the canopy
- 11 the canopy provides easy access to radiator cap.
- 12 sound proofing materials
- 13 Plastic air intake pockets.

	"	1606
fl "L	"	4460
fl "L	"	2477
	L	700