



ISO8528	GC ;) &
SZUTEST	GC - \$\$\$
CE	

2000/14/EC & \$\$\$#(#
 z* \$ z' % \$ D:

	"	"	"	"	Amp
480/277		153,00		139,00	209,00
380/220		145,00		132,00	250,00
208/120		152,00		138,00	479,00

Standard Specifications

Standard Specifications




Manufacturer		John Deere		
Model		6068HF285		
Epa		TIER III		
	L	6,80		
	"	106x127		
		19,0:1		
	fl # Ł	"# "	1800	
	fl "Ł	L	32,50	
AbsorbedAirDischargeReSourceKey.Text	' # "	12,70		
	' # "	32,80		
	° C	527		
		12 V d.c.		
	Load	%"\$İ	'+) İ)\$İ
	# "			
		41,40	32,00	23,50

		Stamford		
		UCI274F		
	Hz	60		
	"	164		
7 cg'		0,80		
		3		
	fl Ł	480/277		
	A	246		
Temperatur		H		

		fl "Ł		fl "Ł	
	"	"	"	"	L
AJD153-U	1600	2440	1120	1650	360
		fl "Ł		fl "Ł	
	"	"	"	"	L
ASM 6	2120	3270	1170	1870	320

D+&

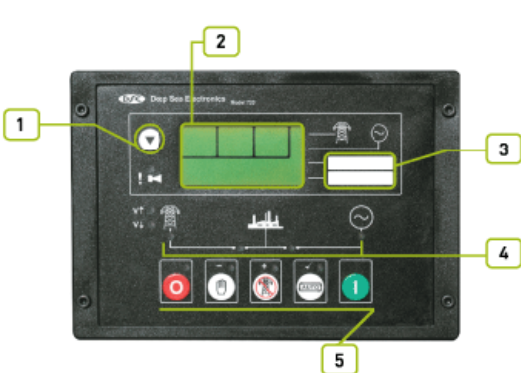

- 1
- 2
- 3
- 4
- 5

f@BŁ
f@%&@Ł
f@%&@BŁ

#

#

6G'9B *\$-\$) \$
6G'9B *%\$\$!*&
6G'9B *%\$\$!*(

GA 8

!%& "

%, !&* \$

%)

ž

ž

ž

AJD153-U

John Deere
Stamford
D+&

5GA * !



- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9

	"	1170
fl "Ł	"	3270
fl "Ł	"	1870
		320