



<b>ISO8528</b>	...	...	...	...	GC ; ) &
<b>SZUTEST</b>	...	...	...	...	GC - \$\$%
<b>CE</b>	...	...	...	...	

**2000/14/EC** &\$\$#( #  
 z\*\$ z'z' D:

	"	"	"	"	Amp
480/277		176,00		160,00	240,00
380/220		160,00		145,00	275,00
208/120		176,00		160,00	555,00

Standard Specifications

Standard Specifications



ALTERNATOR


TRANSFER SWITCH

Manufacturer	John Deere		
Model	6068HF275		
Epa	TIER II		
	L	6,80	
	"	106x127	
		17,0:1	
	fl # ı	"# "	1800
	fl "ı	L	31,50
AbsorbedAirDischargeReSourceKey.Text	' # "	15,00	
	' # "	40,00	
	° C	550	
		12 V d.c.	
	Load	%)\$ı	'+)ı
	# "	)\$ı	
		46,70	35,50 24,00

	Stamford	
	UCI274G	
	Hz	60
	"	184
7 cg'		0,80
		3
	fl ı	480/277
	A	265
Temperatur		H

		fl "ı		fl "ı	
	"	"	"	"	L
AJD176-6	1630	2440	1120	1650	360
		fl "ı		fl "ı	
	"	"	"	"	L
ASM 6	2150	3270	1170	1870	320

### D'+&!'

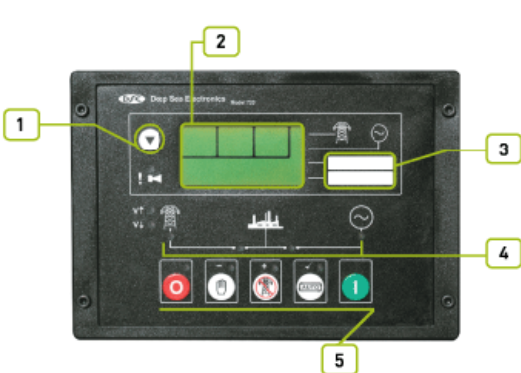

- 1
- 2
- 3
- 4
- 5



f@BŁ  
f@%&@Ł  
f@%&@BŁ

#

#

6G'9B \*\$-\$) \$  
6G'9B \*%\$\$!\*&  
6G'9B \*%\$\$!\*(

GA 8

%, !&\* \$

)  
%&\$)

ž

ž

!%&

"

ž

5GA '\* !'



1. 5GA '\* !'

2. 5GA '\* !'

3. 5GA '\* !'

4. 5GA '\* !'

5. 5GA '\* !'

6. 5GA '\* !'

7. 5GA '\* !'

8. 5GA '\* !'

9. 5GA '\* !'

	"	1170
fl "Ł	"	3270
fl "Ł	"	1870
		320