




ISO8528	GC ;) &
SZUTEST	GC - \$\$\$
CE	

2000/14/EC &\$\$\$(#
 z* \$ z' % \$ D:

	"	"	"	"	Amp
480/277		355,00		321,00	482,00
380/220		352,00		320,00	608,00
208/120		354,00		320,00	1111,00

Standard Specifications

Standard Specifications

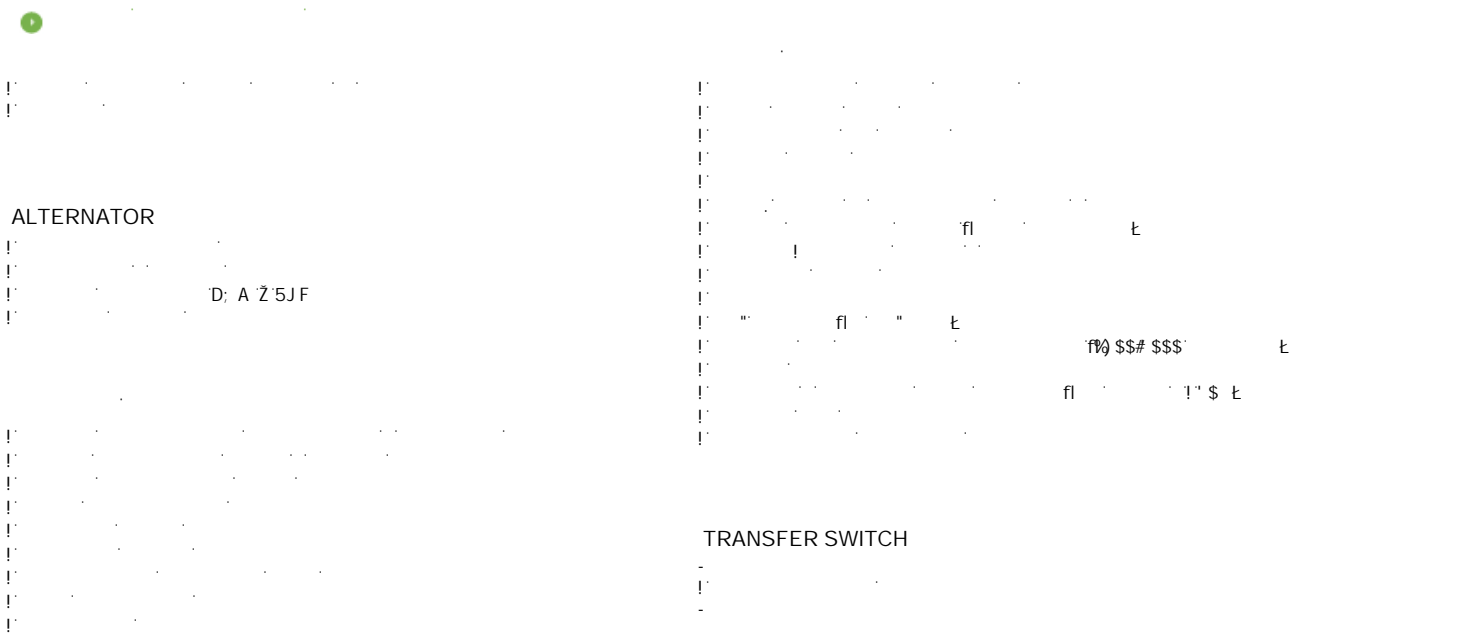

Manufacturer		John Deere		
Model		6135HF485		
Epa		TIER III		
	L	13,50		
	"	132x165		
		16,0:1		
	fl # ı	"# "	1800	
	fl ı	L	60,00	
		L	66,00	
AbsorbedAirDischargeReSourceKey.Text	' # "	33,00		
	' # "	75,00		
	° C	446		
		12 V d.c.		
	Load	%\$ı	'+)ı)\$ı
	# "			
		88,00	65,80	50,30

		Stamford		
		HCI444E		
	Hz	60		
	"	400		
7 cg		0,80		
		3		
	fl ı	480/277		
	A	601		
Temperatur		H		

		fl ı		fl ı	
	"	"	"	"	L
AJD 355-U	3690	3150	1170	2050	330
		fl ı		fl ı	
	"	"	"	"	L
AK 70	4970	4550	1460	2300	650

